




DONGGUAN JING ONE WIRE & CABLE MACHINE CO.LTD  
Address : No.13 ,nanxing Road ,Beizha nanfang industrial zone ,  
Humen town ,Guangdong province ,China Zip Code: 523925  
TEL:86-769 -88920358 ( 8 line) FAX:86-769 -87093015  
<http://www.jing-one.com.cn> E-mail:[chitiezhang@hotmail.com](mailto:chitiezhang@hotmail.com)

## Flat Ribbon Wire Extruder Line

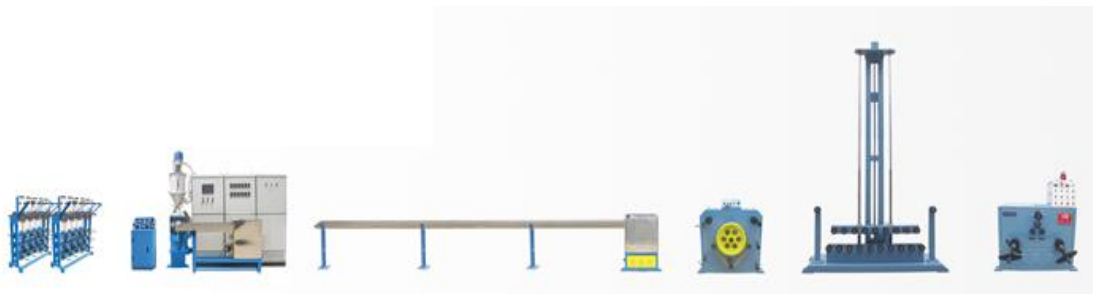

Application:

It is special in UL2468, 2651 and 2678 etc. computer flat ribbon wire production.

Features

The crosshead adopts the fixed centering crosshead, equipped with special accumulator, imported the Taiwan technology, combined with many years of production experience, passed the improved, promoted the wire outlet speed of wire extrusion, solve the

thickness of unevenness, poor adhesion, tension unevenness and the copper wire inside shrink after cutting etc. problems, cutting times and scrap rate was significantly lower, it's the first-selected equipment for traverse manufacturer. Can be equipped with large screen laser diameter gauge to monitoring the wire width.

Model	JO-50-25D	JO-70-25D	JO-80-25D
Cylinder diameter	φ50mm	φ70mm	φ80mm
Spiral data	L/D=26:1 100rpm	L/D=26:1 10-80rpm	L/D=26:1 10-70rpm
Extrusion capacity	70KG/H	150KG/H	200KG/H
Line Speed	10-150m/min	10-150m/min	5-100m/min
For coil	φ300mm below	φ300mm below	φ300mm below
Main machine power	11KW	22KW	30KW
Merge number	1-16(2468)	1-64(2651)	1-80(2678)
Capstan power	3KW	4KW	5.5KW
Take-up motor	2.2Motor	2.2Motor	2.2Motor