




DONGGUAN JING ONE WIRE & CABLE MACHINE CO.LTD
 Address : No.13 ,nanxing Road ,Beizha nanfang industrial zone ,
 Humen town ,Guangdong province ,China Zip Code: 523925
 TEL:86-769 -88920358 (8 line) FAX:86-769 -87093015

<http://www.jing-one.com.cn> [E-mail:chitiezhang@hotmail.com](mailto:chitiezhang@hotmail.com)

Data cable extruder line

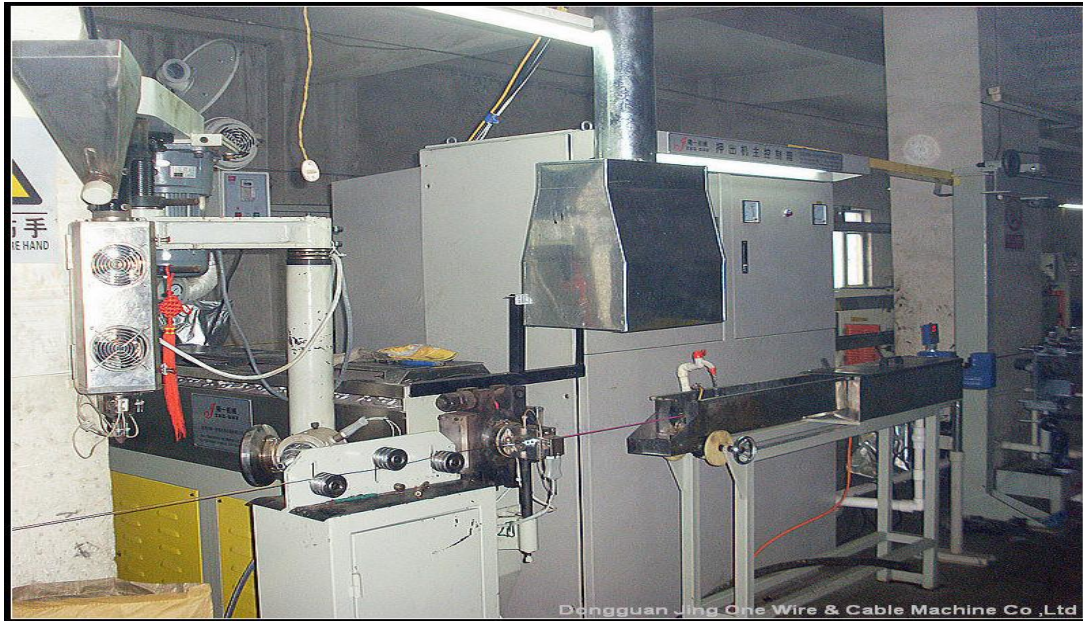

Application: Suitable for PVC, PU and PE etc. plastics to extrusion, mainly used for the UN electrical wire production.

Equipment constitute: It is composed of pay-off, straightening device, mainframe, main control cabinet, printer, water trough, accumulator, capstan, take-up machine etc. accessory. Optional single-head/double-head/active type pay-off/PLC computer all-process control, laser diameter gauge and copper pre-heater.

Model	JO-50+35mm	JO-60+35mm	JO-70+35mm
Pay-off type	Active single shaft tension pay-off		
Pay-off wire spool	PN400-500mm	PN500-600mm	PN400-630mm
Screw diameter	φ50mm	φ60mm	φ70mm
Screw L/D ratio	25:1	25:1	25:1
Extrusion output	70kg/h	100kg/h	130kg/h
Main motor power	15HP	20HP	30HP
Wire diameter specification	0.6-4.0mm	0.8-8mm	1.5-12mm
Temperature control	5Segment	6Segment	6Segment
Cooling device	Single/Double/U model		
Capstan power	3HP	4HP	5HP
Accumulator type	horizontal		

Accumulate length	250m	250m	200m
Outlet wire speed	MAX500m/min		
Take-up type	Double shaft bundle install/shaft install		
Take-up spool	PN400-500mm	PN400-500mm	PN500-630mm
Electric control	PLC Or Common		