



DONGGUAN JING ONE WIRE & CABLE MACHINE CO.LTD
Address : No.13 ,nanxing Road ,Beizha nanfang industrial zone ,
Humen town ,Guangdong province ,China Zip Code: 523925
TEL:86-769 -88920358 (8 line) FAX:86-769 -87093015


<http://www.jing-one.com.cn> [E-mail:chitiezhang@hotmail.com](mailto:chitiezhang@hotmail.com)

500-630mm back-twist and pair-twist machine

Vertical type pair twist



Horizontal Type Pair Twist

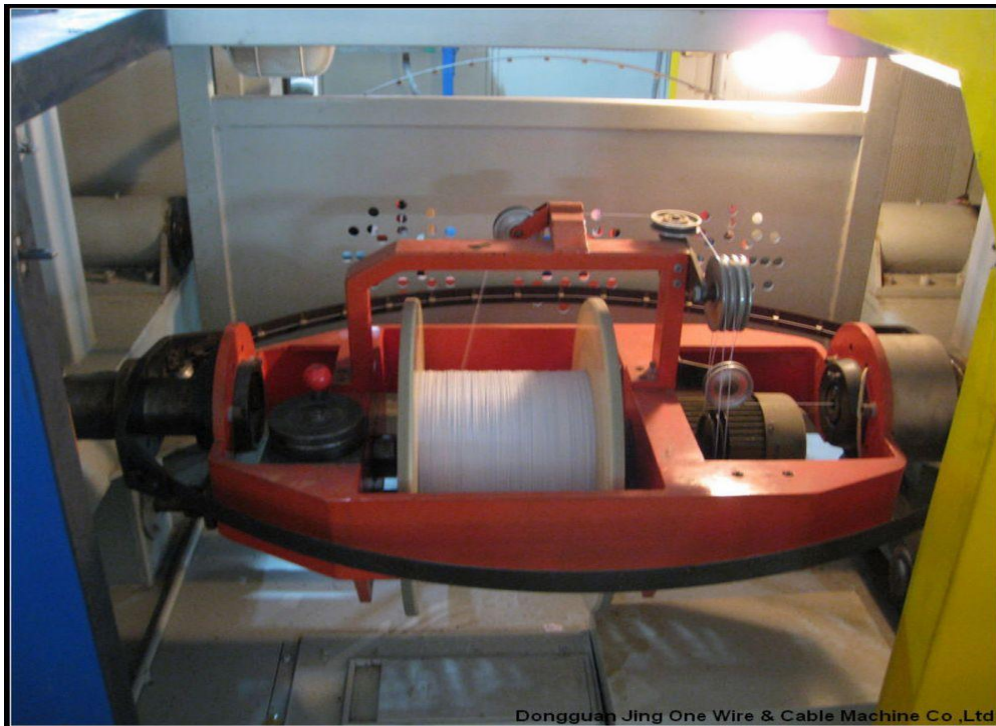

Application :

Suit For pair twisting Lan wire , CAT5/6 , CAT5E/6E core wire.

Model	JO-φ500mm	JO-φ630mm
Max core wire diameter	1.50mm	1.50mm
Max twisting outer diameter	3.0mm	3.0mm
Pitch scope	10~30mm(each other 0.5mm for one grade, divided into,35 Sets, change gear, when ordering, select and use)	
Back-twist degree	0~50% Arbitrary adjustable	
Take-up twist-bow max speed	200~2500rev/min	200~2500rev/min
Wring speed	400~5000 twist/min	400~5000twist/min
Max line speed	150m/min	150m/min
Twisting direction	Left or right	Left or right
Take-up twist-bow max speed	100~1500 rev (step-less adjustable)	
Tension regulating scope	5~25N	
Take-up tension	Japan Mitsubishi magnetic powder clutch	
Take-up motor power	7.5KW Three-phase AC motor ,frequency conversion speed	
Back-twist pay-off motor power	7.5KW Three-phase AC motor, frequency conversion speed	
Take-up wire bobbin size	φ500xφ250x250mm(inner width)x300(outside width)x56mm(shaft)	φ630xφ250x400mm(inner width)x475(outside width)x56mm(shaft)
Pay-off wire bobbin size	φ500xφ250x250mm(inner width)x300(outside width)x56mm(shaft)	φ500xφ250x250mm(inner width)x300(outside width)x56mm(shaft)